

Lifting & Hoisting

Chain Blocks

Loadsafe Chain Block

Durable and robust, all Loadsafe chain blocks are fitted with an overload activated clutch, limiting the maximum operating force and allowing for greater operator protection from injury and the chain block from damage.

Capacity:

0.50t to 50.0t

Applications:

Automotive, Agriculture, Construction, Engineering, Infrastructure, Logistics, Manufacturing, Mining, Ports, Utilities.


Complies with:

AS/NZS1418

Product Features


- Factory proof tested to 1.5x W.L.L.
- Unique hand wheel and free wheel design.
- Hook tip with cast steel self-locking latches.
- Lower hook complete with thrust race bearing.
- Fully machined lift wheel, supported by needle roller bearings.



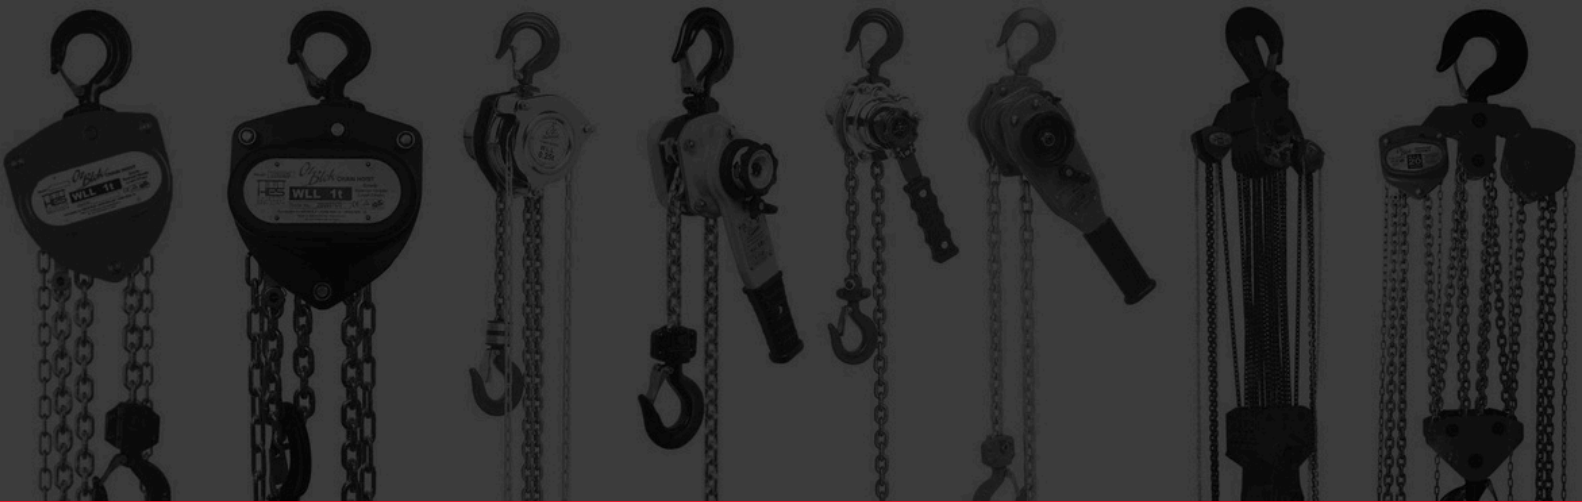

Lifting & Hoisting

Chain Blocks

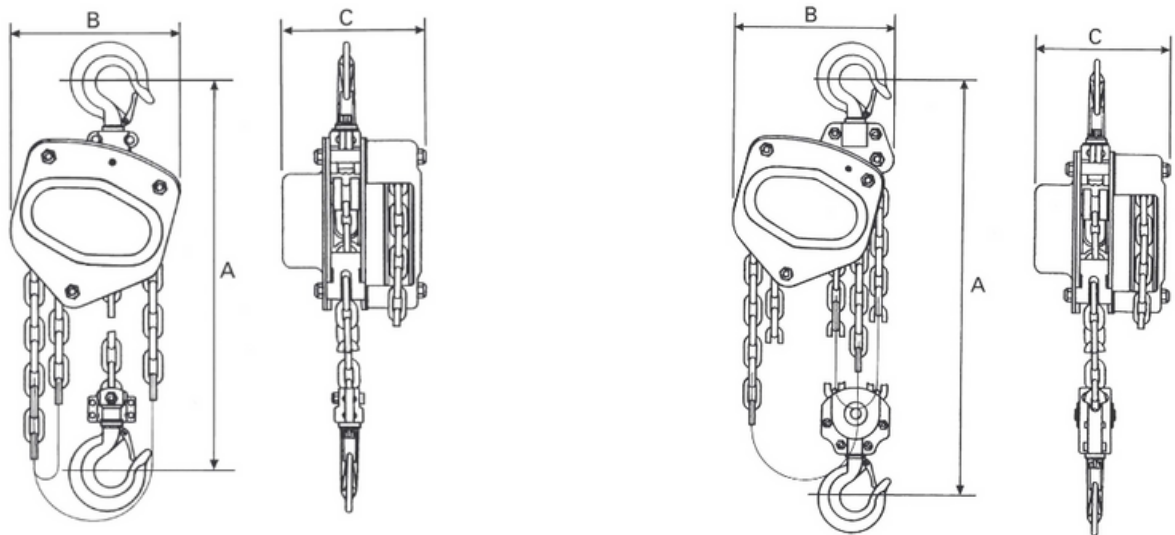

DIMENSIONS

1 & 2 tonne


3 & 5 tonne

PRODUCT CODE	WORKING LOAD LIMIT (W.L.L.)	A	B	C	H
CBOZLS010-3	1.0t	317mm	158mm	140mm	28.0mm
CBOZLS020-3	2.0t	414mm	187mm	161mm	33.5mm
CBOZLS030-3	3.0t	465mm	210mm	161mm	40.0mm
CBOZLS050-3	5.0t	636mm	253mm	161mm	50.0mm
CBOZLS010-6	1.0t	317mm	158mm	140mm	28.0mm
CBOZLS020-6	2.0t	414mm	187mm	161mm	33.5mm
CBOZLS030-6	3.0t	465mm	210mm	161mm	40.0mm
CBOZLS050-6	5.0t	636mm	253mm	161mm	50.0mm



Ready to speak with an expert? Call now on 1300 692 565

Visit us today at ozblok.com.au

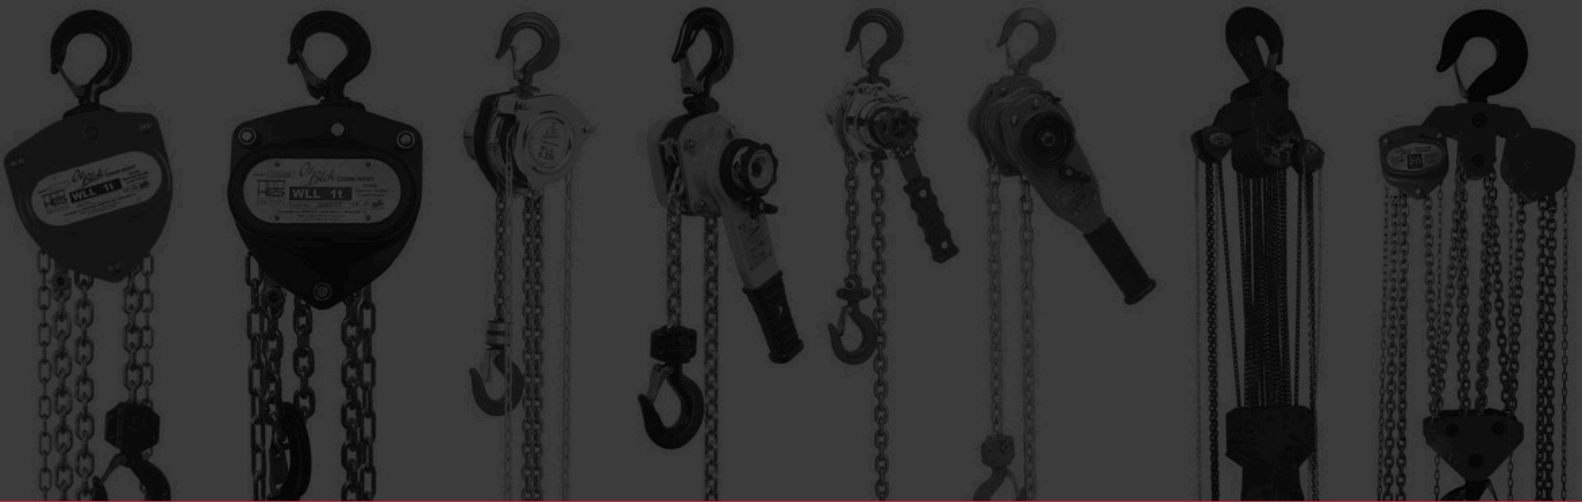

Lifting & Hoisting

Chain Blocks



SPECIFICATIONS

PRODUCT CODE	WORKING LOAD LIMIT (W.L.L.)	STANDARD LIFT	FALLS OF CHAIN	HAND EFFORT TO LIFT W.L.L.	LOAD CHAIN Ø	NET WEIGHT
CBOZLS010-3	1.0t	3m	1	30kg	6mm	12kg
CBOZLS020-3	2.0t	3m	1	35kg	8mm	18kg
CBOZLS030-3	3.0t	3m	2	37kg	8mm	25kg
CBOZLS050-3	5.0t	3m	2	41kg	10mm	37kg
CBOZLS010-6	1.0t	6m	1	30kg	6mm	17kg
CBOZLS020-6	2.0t	6m	1	35kg	8mm	24kg
CBOZLS030-6	3.0t	6m	2	37kg	8mm	35kg
CBOZLS050-6	5.0t	6m	2	41kg	10mm	52kg